


For Hero 11/10/9/8/MAX Camera Remote Control


Disclaimer

Please read this statement carefully and by using this product you will be deemed to have acknowledged and accepted it in full. Please check the product carefully before each use and do not use it if damaged or deformed. By using this product, you acknowledge and agree that you are fully responsible for your actions and the possible consequences of using this product. You undertake to use this product only for legitimate and lawful purposes. You understand and agree that Telesin Digital Co.,Ltd ("Telesin") shall not be liable for any misuse, adverse effects, damages, injuries, penalties or other legal consequences arising directly or indirectly from the use of this product. The user should follow the precautions including but not limited to those mentioned herein. To the extent Telesin reserves the right to interpret and modify this commitment within the limits of national laws and regulations.

Wearing The Remote

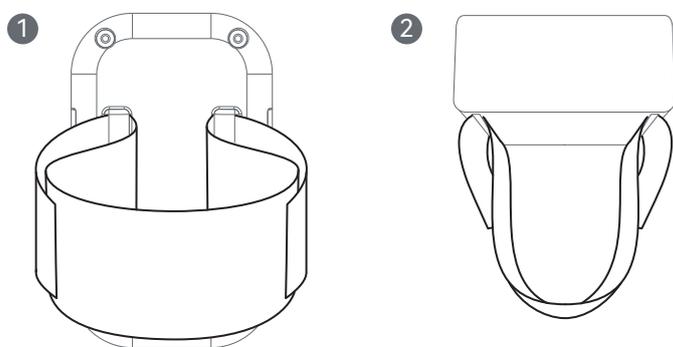

The Basics

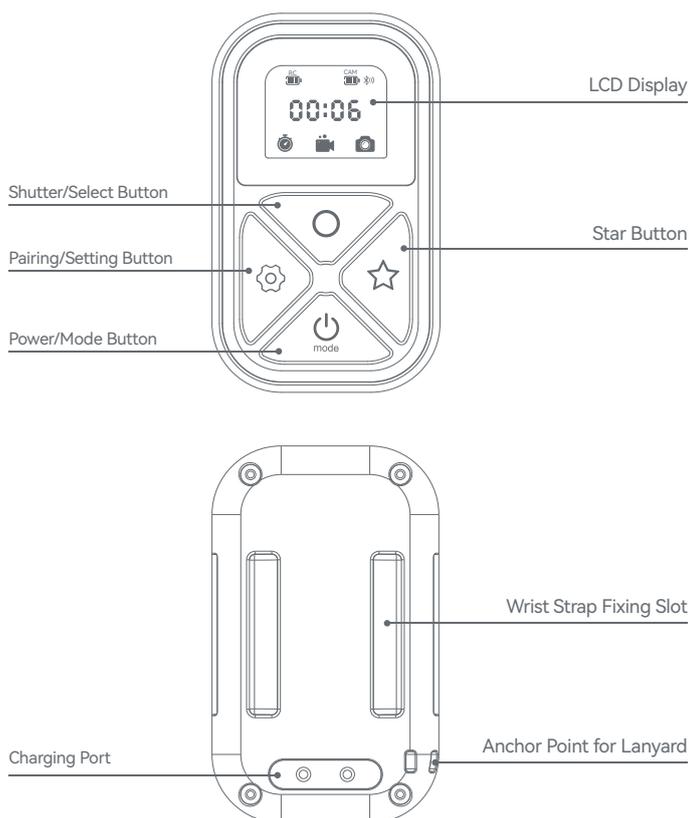

LCD Display

RC	Remote Control Battery		Time Lapse
CAM	Camera Battery		Video
	Bluetooth		Photo
00:06	Recording Time/ Number of Videos/Photos		

Button



Shutter/Select Button

1 Short Press

Shoot photo, turn on/off recording

3S Long Press

Enter phone pairing mode, only photo function in phone mode, Bluetooth name is "T-10"



Star Button

When in the three main modes "Video", "Photo", "Time-lapse"

3S Long Press

Set the current main mode to "Quick mode"

1S Short Press

Enter to the "Quick mode"



Mode Button [Power/Mode Switching]

2S Long Press

Power On

3S Long Press

Power Off

1S Short Press

Mode Switching

(After pairing, you can control the camera on and off)



Setting Button [Pairing, small mode switching]

1 Short Press

The camera switches among the sub-modes.

Pairing

Setting Button 3S Long Press

The remote control enters pairing mode, and the Bluetooth indicator flashes

Camera Settings

Select Connections > Connected Devices > Remote Control. Put the camera into pairing mode. Wait for a successful pairing message to appear on the camera screen.

- If the pairing fails, select Reset Connection in the camera settings and repeat the process.

If the camera has already been paired, you don't need to pair it again when you connect the remote control next time, just make sure the wireless connection of the camera has been turned on, and it will be connected automatically after a few moments.

When the camera is not used for a long time, the wireless connection may be turned off completely, so please unplug the camera battery and plug it back in to activate the wireless connection.

Pair up to 5

1 Cameras mode

In the state of the first camera connected, long press the [pairing button 3 seconds remote control Bluetooth [indicator] flashing, you can connect the second camera and so on, the maximum number of connected 5

2 Status Display

The display status of the first camera connected

3 Power On/Off


All the connected cameras can be controlled at the same time to [On/Shutdown]

Charging

Plug the charging cable into the charging slot. Connect the other end of the cable to a computer or other USB power source

Charging Time **2.5h**

Usage Time **10h**



Charging Port

⚠ Please keep the charging device away from metal objects to prevent fire caused by short circuit.

- When charging, the screen lights up and the power indicator starts to work

Electricity Level

Remaining Power	CAM Display	RC Display
0~5	Side Blinking	Side Always On
5~24	Side Always On	
25~49	1/3 Power	1/3 Power
50~74	2/3 Power	2/3 Power
75~100	Full Power	Full Power

EC REP
Sea&Mew Consulting Ltd
Mitternubel Straße 4, 92318 Neumarkt
Compliance.EU@outlook.com
Contact Person: Yuan Li

UK REP
Sea&Mew Accounting Ltd
Address:Electric Avenue Vision 25, London, Enfield EN3 7GD
info@seamew.net
Contact Person: Billy Han

